


Vinilicos MG

ORIGIN




TECHNICAL DATA-ISO 10581

STANDARD	METHOD	UNIT	ORIGIN
Type of Flooring	EN ISO 10581	-	Homogeneous Sheet
Surface Treatment		-	Deep Clean UV+
Roll length		m	20
Width	ISO 24341	mm	2,000
Thickness	ISO 24346	mm	2.0
Weight	ISO 23997	g/m ²	2,800
Classification	ISO10874	-	34/43
Reaction to fire	EN 13501-1	-	Bfl-s1
Static electrical propensity	EN 1815	kV	<2
	DIN 51130	-	R9
Slip resistance	EN 13893	-	DS
Residual indentation	ISO 24343-1	mm	≤0.1
Dimensional stability	ISO 23999	%	≤0.4
Color fastness to light	ISO 105-B02	-	≥6
Wear resistance	EN 660-2	-	group T
Castor chair test	ISO 4918	-	no change
Chemical resistance	ISO 26987	-	no change
Flexibility	ISO 24344	-	no crack
Thermal resistance	EN 12664	m ² ·k / w	approx 0.01
Impact sound insulation	ISO 10140	dB	>3

STRUCTURE

2.0mm X 2,000mm X 20M/Roll

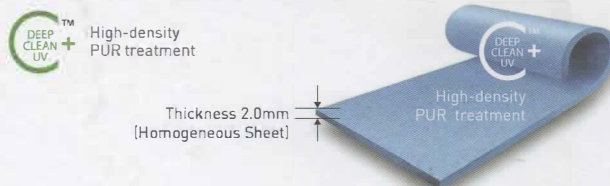

APPLICATIONS



Healthcare



Education



Retail

FEATURE



Superior Durability

- Not easily worn out against heavy traffic
- Wear Group T (EN 660-2)



DEEP CLEAN UV+ Surface Treatment

- High-density PUR surface treatment allows strong iodine resistance and anti-bacterial effect.



Phthalate & Heavy metal free

- Use phthalate free plasticizers only
- No hazardous ingredients used during production

